

■ Model No. **KCV-50** (with Li-ion Battery & Charger)

Height : 317 mm
Weight : 2.2 kgs (w/o battery)

■ Cutting Capacity:

- Max. Cable diameter:
Nonferrous 50 mm

■ Specifications:

Drive unit: 18V DC Motor
Charger (BOCSH):
Input voltage : **KCV-50-120**
110V Single Phase AC
Input voltage : **KCV-50-230**
230V Single Phase AC
Input frequency: 50-60 Hz
Input current: 21.75 VA


■ Accessories:

- KuDos plastic carrying case
- 18V Battery, 110V or 230V Charger
(See page 65)



※ For reference only

Model No.	Specification
Polyethylene cable	600V-CV325 mm ² (31 mm OD)
	600V-CV150 mm ² x 3(46 mm OD)
	600V-CV500 mm ² (38 mm OD)
	6KV-CVT500 mm ² (45 mm OD)
Multi-core vinyl insulation cable	VVR150 mm ² (47 mm OD) 3 core
Soft copper cable	IV500 mm ² (35 mm OD)
Hard copper cable	150 mm ² (21 mm OD)

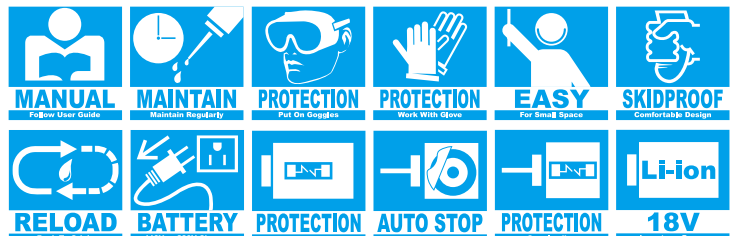

■ Model No. **KCV-54** (with Li-ion Battery & Charger)

Height : 338 mm
Weight : 3.0 kgs (w/o battery)

■ Cutting Capacity:

- Max. Cable diameter:
Nonferrous 54 mm & Steel supported
400-pair telecom cable

■ Specifications:

Drive unit: 18V DC Motor
Charger (BOCSH):
Input voltage : **KCV-54-120**
110V Single Phase AC
Input voltage : **KCV-54-230**
230V Single Phase AC
Input frequency: 50-60 Hz
Input current: 21.75 VA

■ Accessories:

- KuDos plastic carrying case
- 18V Battery, 110V or 230V Charger
(See page 65)



※ For reference only

Model No.	Specification
Polyethylene cable	600V-CV325 mm ² (31 mm OD)
Multi-core vinyl insulation cable	VVR150 mm ² (47 mm OD) 3 core
SB-ACSR	ACSR120 mm ² (18.6 mm OD) ACSR shall under steel of 2.0mm
Hard aluminum cable	HAL-OC400 mm ² (31.9mm OD)
Hard copper cable	OE-OC150 mm ² (21 mm OD)
SS cable	0.4 mm 400 CCP-F-SS(CR) cable

