

BATTERY OPERATED TOOLS

■ Model No. **K-S24** (with Li-ion Battery & Charger)

Length : 356 mm

Weight : 3.8 kgs(w/o battery)

■ Specifications:

Drive unit : 18V DC Motor

Charger (GS/CE):

Input voltage : 110V Single Phase AC

Input voltage : 230V Single Phase AC

Input frequency : 50-60 Hz

Reservoir capacity : 48 cc

■ Cutting Capacity:

Max. Pressure : 700 bar

Oil Required : 31 cc

Max Output : 8.78 tons / 78.1 kN

Wire rope 6x7 : 18 mm

Wire rope 6x12 : 24 mm

Wire rope 6x19 : 24 mm

Soft steel bar : 20 mm

Reinforcing rod : 16 mm

Cu strands : 24 mm

Al strands : 24 mm

ACSR Cable : 24 mm

Guy wire 1x7 : 20 mm

Guy wire 1x19 : 20 mm

Cutting of piano wire is prohibited.



LED

Illumination



18V

Long-term Power



MANUAL

Follow User Guide



MAINTAIN

Maintain Regularly



PROTECTION

Put On Goggles



PROTECTION

Work With Glove



EASY

For Small Space



SKIDPROOF

Comfortable Design



180°

Hand Rotation



RELOAD

Back To Origin



BATTERY

110V or 230V Charger



PROTECTION

Low V protection



PROTECTION

Over-heating



Bare Strands



ACSR Cable



GUY WIRE



Soft Steel Bar



CU / AL



SPEED DELIVERY

**NEW
PRODUCT**

BATTERY OPERATED TOOLS

KuDos®
Professional Hydraulic Tools.

■ Model No. **K-P50** (with Li-ion Battery & Charger)

Length : 427 mm

Weight : 3.3 kgs (w/o battery)

■ Specifications:

Drive unit : 18V DC Motor

Charger (GS/CE) :

Input voltage : 110V Single Phase AC

Input voltage : 230V Single Phase AC

Input frequency : 50-60 Hz

Reservoir capacity : 48 cc

■ Crimping Capacity:

Max. Pressure : 520 bar

Max Output : 5.53 tons / 49.2 kN

Adaption heads as below

(Sold Separately)



•LED light support

•Auto retraction function :
once reach cutting pressure
will automatically retract
piston

•Light weight and easy
to use by single hand
at narrow working space

•When overloaded crimped / cut ;
the LED will sparkle.
•When battery at low charged ,
the LED will light on.

•350 degree swivel and lock pin head
allows easy cutting position



•Retractable on high pressure stage

•Ergonomic design and comfortable
to use with anti-slip coated grip

•Low-voltage protection for extending
battery life cycle
•Motor brake function as terminated
immediately when completed operation
•Over voltage protection system to avoid
motor damage or over heating

•18V Li-ion battery

※ Above pressing jaws are sold separately.

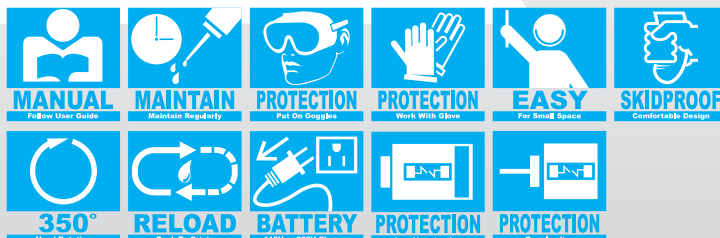

NEW
PRODUCT

BATTERY OPERATED TOOLS

■ Model No. **K-P50** Adepton Heads

A13-SU



- For 1/2" pipe

A20-SU



- For 3/4" pipe

A25-SU



- For 1" pipe

B13-SU



- For 1/2" pipe

B20-SU



- For 3/4" pipe

B25-SU



- For 1" pipe

KP-50CP



Weight : 2.0 kgs
Opening : 46.5 mm

KP-50CT



Weight : 2.0 kgs
Cutting Opening : 32 mm
Cutting Capacity : Max 325 mm²

KP-50TR



Weight : 0.2 kgs
Thread Rod Cutting Adapter :
3/8" -16 UNC
Suited Material : Iron

※ (Standard JIS G3448)

