

■ Model No. HP-700A

Length : 595 mm

Weight : 8.8 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 720 cc

■ Oil Delivery:

12.26 cc / stroke at low pressure

2.26 cc / stroke at high pressure

■ Features:

- Dual speed pump piston for rapid advance.
- Two stage pumping action
- External adjustable pressure setting up to 700 bar.
- Internal oil bladder type oil reservoir allows operation in any position.
- Replaceable dropout bypass valve cartridge for easy repair.
- Economical yet dependable hydraulic hand pump.

■ Accessories:

2M hydraulic hose attached



PUMPS

■ Model No. HP-700AG

Length : 595 mm
Weight : 10.4 kgs

■ Specifications:

Max. Pressure : 700 bar
Oil Required : 720 cc

■ Oil Delivery:


12.26 cc / stroke at low pressure
2.26 cc / stroke at high pressure

■ Features:

- Dual speed pump piston for rapid advance.
- Two stage pumping action.
- External adjustable pressure setting up to 700 bar.
- Internal oil bladder type oil reservoir allows operation in any position.
- Replaceable dropout bypass valve cartridge for easy repair.
- Economical yet dependable hydraulic hand pump.
- Attached with pressure gauge for pressure display.

■ Accessories:

2M hydraulic hose attached

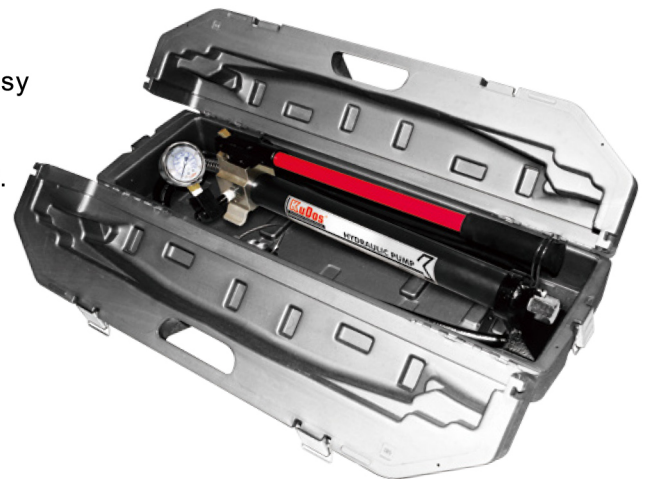

●Pressure Gauge



■ Model No. HP-30S

Length : 600 mm

Weight : 14.0 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 3000 cc

■ Oil Delivery:

12.26 cc / stroke at low pressure

2.26 cc / stroke at high pressure

■ Features:

- Dual speed pump piston for rapid advance.
- Two stage pumping action .
- External adjustable pressure setting up to 700 bar.
- Economical yet dependable hydraulic hand pump.

■ Accessories:

2M hydraulic hose attached



※ Steel case colour for reference only.

■ Model No. HF-700

Length : 656 mm

Weight : 9.3 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 720 cc

■ Oil Delivery:

12.26 cc / stroke at low pressure

2.26 cc / stroke at high pressure

■ Features:

- Dual speed pump piston for rapid advance.
- Two stage pumping action .
- External adjustable pressure setting up to 700 bar.
- Internal oil bladder type oil reservoir allows operation in any position.
- Replaceable dropout bypass valve cartridge for easy repair.
- Economical yet dependable hydraulic hand pump.
- To comply with ergonomic design for hand and feet use.

■ Accessories:

2M hydraulic hose attached



PUMPS

■ Model No. **HF-700G**

Length : 656 mm

Weight : 9.9 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 720 cc

■ Oil Delivery:

12.26 cc / stroke at low pressure

2.26 cc / stroke at high pressure

■ Features:

- Dual speed pump piston for rapid advance.
- Two stage pumping action.
- External adjustable pressure setting up to 700 bar.
- Internal oil bladder type oil reservoir allows operation in any position.
- Replaceable dropout bypass valve cartridge for easy repair.
- Economical yet dependable hydraulic hand pump.
- To comply with ergonomic design for hand and foot use.
- Attached with pressure gauge for pressure display.

■ Accessories:

2M hydraulic hose attached



●Pressure Gauge

PUMPS

■ Model No. **PQ-700G**

Length : 707 mm

Weight : 13.2 kgs



■ Specifications:

Max. Pressure : 700 bar

Oil Required : 1200 cc

■ Oil Delivery:

13.6 cc / stroke at low pressure


1.9 cc / stroke at high pressure

■ Features:

- Dual speed pump piston for rapid advance.
- Two stage pumping action.
- External adjustable pressure setting up to 700 bar.
- Internal oil bladder type oil reservoir allows operation in any position.
- Replaceable dropout bypass valve cartridge for easy repair.
- Economical yet dependable hydraulic foot pump.
- Attached with pressure gauge for pressure display.

■ Accessories:


2M hydraulic hose attached

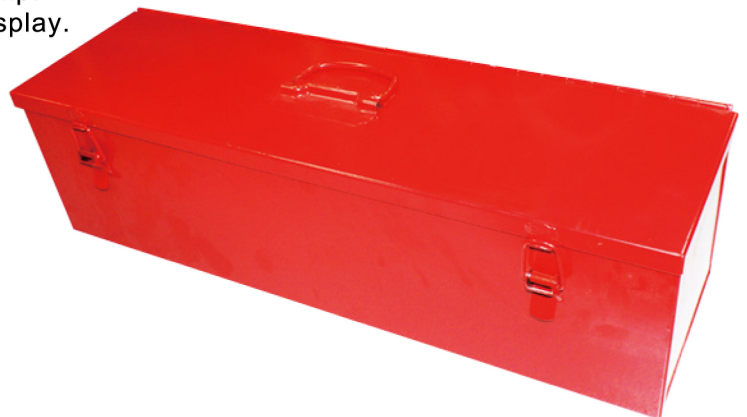

※ Steel case colour for reference only.



● Pressure Gauge



● New Design Of Release Lever



MANUAL
Follow User Guide

MAINTAIN
Inspect Regularly

PROTECTION
Put On Goggles

PROTECTION
Work With Gloves

■ Model No. HYP-700FT

Length : 720 mm

Weight : 13.5 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 1000 cc

■ Oil Delivery:

35.8 cc / stroke at low pressure


2.1 cc / stroke at high pressure

■ Features:

- Dual speed pump piston for rapid advance.
- Two stage pumping action.
- External adjustable pressure setting up to 700 bar.
- Internal oil bladder type oil reservoir allows operation in any position.
- Replaceable dropout bypass valve cartridge for easy repair.
- Economical yet dependable foot hydraulic pump.

■ Accessories:

2M hydraulic hose attached

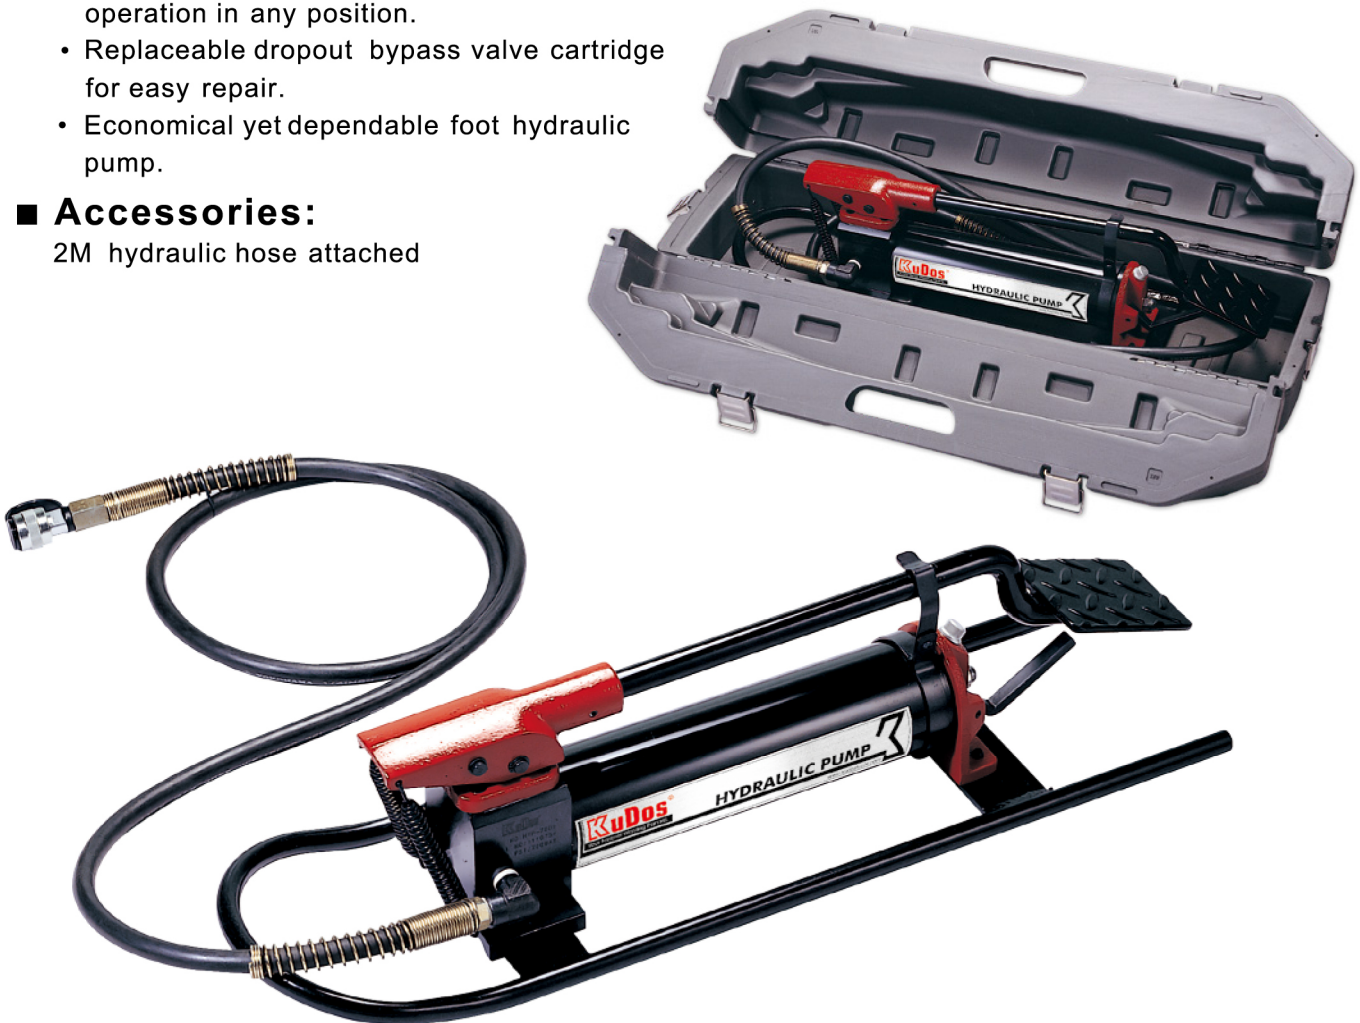

PUMPS

■ Model No. **HYP-700FTG**

Length : 720 mm
Weight : 13.7 kgs

■ Specifications:

Max. Pressure : 700 bar
Oil Required : 1000 cc

■ Oil Delivery:

35.8 cc / stroke at low pressure
2.1 cc / stroke at high pressure

■ Features:

- Dual speed pump piston for rapid advance.
- Two stage pumping action.
- External adjustable pressure setting up to 700 bar.
- Internal oil bladder type oil reservoir allows operation in any position.
- Replaceable dropout bypass valve cartridge for easy repair.
- Economical yet dependable hydraulic foot pump.
- Attached with pressure gauge for pressure display.

■ Accessories:

2M hydraulic hose attached



※ Steel case colour for reference only.



● Pressure Gauge



■ Model No. **HP-30MD**

Length : 745 mm

Weight : 17.9 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 3000 cc

■ Oil Delivery:

12.26 cc / stroke at low pressure


2.26 cc / stroke at high pressure

■ Features:

- Dual speed pump piston for rapid advance
- Two stage pumping action
- External adjustable pressure setting up to 700 bar
- Exconomial yet dependable hydraulic hand pump
- Attached with pressure gauge for pressure display

■ Accessories:

Hydraulic hose should be ordered separately

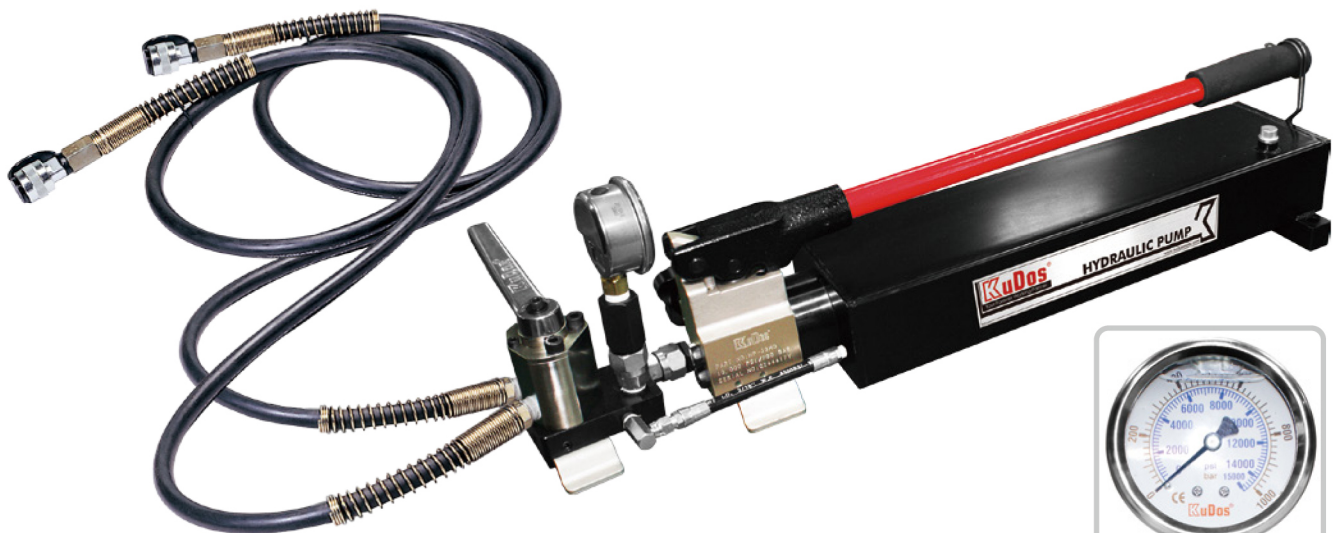

●Pressure Gauge

