

■ Model No. **HYSC-32**

Length : 580 mm

Weight : 9.1 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 84 cc

Max. Output : 15.82 tons / 140.7 kN

■ Cutting Capacity:

Wire rope 6x7 : 32 mm

Wire rope 6x12 : 32 mm

Wire rope 6x19 : 32 mm

Soft steel bar : 25 mm

Reinforcing rod : 25 mm

Cu strands : 32 mm

Al strands : 32 mm

ACSR : 32 mm

Guy wire 1x7 : 32 mm

Guy wire 1x19 : 32 mm

Underground cable : 32 mm

Cutting of piano wire is prohibited.

■ Features:

- Single Stage Pumping action.
- 180° rotating head for convenient operation.
- Superior guillotine type cutting for less jamming than shear type cutters.
- All blades are easily replaceable.
- Flip-top latch for easy insertion of cutting material.
- Spring return.
- No set-up required.
- Lightweight, self-contained tool, can be used anywhere.

■ Accessories:

Carrying Bag



| | |
|-------------|--------------|
| HYSC-32 #56 | Moving Blade |
| HYSC-32 #53 | Fixed Blade |



Bare Strands **ACSR Cable** **GUY WIRE** **Soft Steel Bar** **CU / AL**



180° **RELOAD**

CUTTERS

■ Model No. **HYSC-45**

Length : 683 mm

Weight : 6.7 kgs

■ Specifications:

Max. Pressure : 700 bar

Oil Required : 70 cc

Max. Output : 10.73 tons / 95.5 kN

■ Cutting Capacity:

Wire rope 6x7 : 40 mm

Wire rope 6x12 : 40 mm

Wire rope 6x19 : 40 mm

Soft copper bar : 32 mm

Soft aluminum bar : 40 mm

Soft steel bar : 20 mm

Cu strands : 40 mm

Al strands : 40 mm

ACSR : 40 mm

Cutting of piano wire is prohibited.

■ Features:


- Light weight portable hydraulic cutter features.
- Single action cylinder with spring return.
- Guillotine type cutting for less jamming than shear type cutting.
- No set-up time required.
- Blades are easily replaceable.
- 180° swivel and lock pin type head allows easy cutting position.

■ Accessories:

Carrying Bag



| | |
|------------|--------------|
| HYSC-45 #8 | Moving Blade |
| HYSC-45 #2 | Fixed Blade |

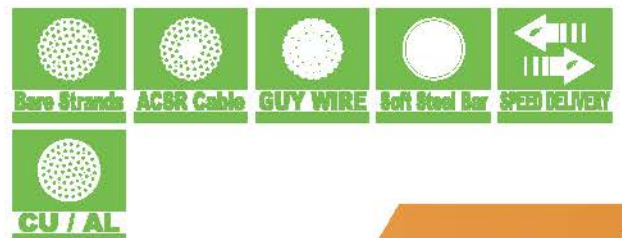

CUTTERS

■ Model No. S-55

Length : 631 mm
Weight : 10.3 kgs

■ Specifications:

Max. Pressure : 700 bar
Oil Required : 107 cc
Max. Output : 14.01 tons / 124.6 kN

■ Cutting Capacity:

Wire rope 6x7 : 25 mm
Wire rope 6x12 : 30 mm
Wire rope 6x19 : 30 mm
Soft copper bar : 35 mm
Soft aluminum bar : 28 mm
Soft steel bar : 22 mm
Reinforcing rod : 19 mm
Cu strands : 54 mm
Al strands : 54 mm
ACSR : 54 mm
Guy wire 1x7 : 15 mm
Guy wire 1x19 : 20 mm
Underground cable : 50 mm

Cutting of plano wire is prohibited.

■ Features:

- Light weight portable hydraulic cutter features.
- Single action cylinder with spring return.
- Guillotine type cutting for less jamming than shear type cutting.
- No set-up time required.
- Blades are easily replaceable.
- 180° swivel and lock pin type head allows easy cutting position.

■ Accessories:

Carrying Bag



| | |
|----------|--------------|
| S-55 #70 | Moving Blade |
| S-55 #87 | Fixed Blade |

