

■ Model No. SH-70A

Height : 371 mm

Weight : 14.8 kgs

■ Specifications:

Throat Depth : 70 mm

Max. Pressure : 700 bar

Oil Required : 76 cc

Max. Output : 34.20 tons / 304.3 kN

■ Punching Capacity:

- Max. Thickness : 10 mm
- Max. Diameter : 20.5 mm
- 20.5 mm diameter hole with 10 mm thick mild steel
- For angle iron, plates, beams and bus bars

■ Features:

- C-Head made by forging for greater strength.
- Convenient handle for easy carrying.
- Base stand for easy positioning and accurate punching.
- Single action piston/cylinder arrangement reduces iron chippings.
- Punch and die changeover tools included.
- Operated by any hydraulic pump with rated oil pressure of 700 bar (10,000 psi).
- Efficient and safe to use.

■ Accessories:

Round Punching Dies for mild steel
(10.5, 13.5, 17.5, 20.5 mm)

Hand Pin, 4 mm T-type Wrench



Other Punching Die Option :



Square Punching Dies :
5/16" 、 3/8" 、 7/16" 、 1/2"



Oval Punching Dies :
5/16" 、 3/8" 、 7/16" 、 1/2"

※ Customize punching die set also available, sold separately.

PUNCHERS & BENDERS

■ Model No. SH-2070

Height : 371 mm

Weight : 14.5 kgs



■ Specifications:

Throat Depth : 70 mm

Max. Pressure : 700 bar

Oil Required : 116 cc

Max. Output : 34.20 tons / 304.3 kN

■ Punching Capacity:

- Max. Thickness :
 - Steel plate : ≤ 10 mm
 - Copper plate : ≤ 20 mm
 - Aluminum plate : ≤ 20 mm
- Max. Diameter : 20.5 mm
- 20.5 mm diameter hole with 10 mm thick mild steel.
- For angle iron, plates, beams and bus bars.

■ Features:

- C-Head made by forging for greater strength.
- Convenient handle for easy carrying.
- Base stand for easy positioning and accurate punching.
- Single action piston/cylinder arrangement reduces iron chippings.
- Punch and die changeover tools included.
- Operated by any hydraulic pump with rated oil pressure of 700 bar (10,000 psi).
- Efficient and safe to use.

■ Accessories:

Round Punching Dies for mild steel
(10.5, 13.5, 17.5, 20.5 mm)



Other Punching Die Option :



Copper Plate Punching Dies :
10.5 、 13.5 、 17.5 、 20.5



Steel Plate Punching Dies :
10.5 、 13.5 、 17.5 、 20.5

※ Customize punching die set also available, sold separately.



Double-hole type of hydraulic punching machine

Available: angle-steel, circle, oval for drilling a hole.

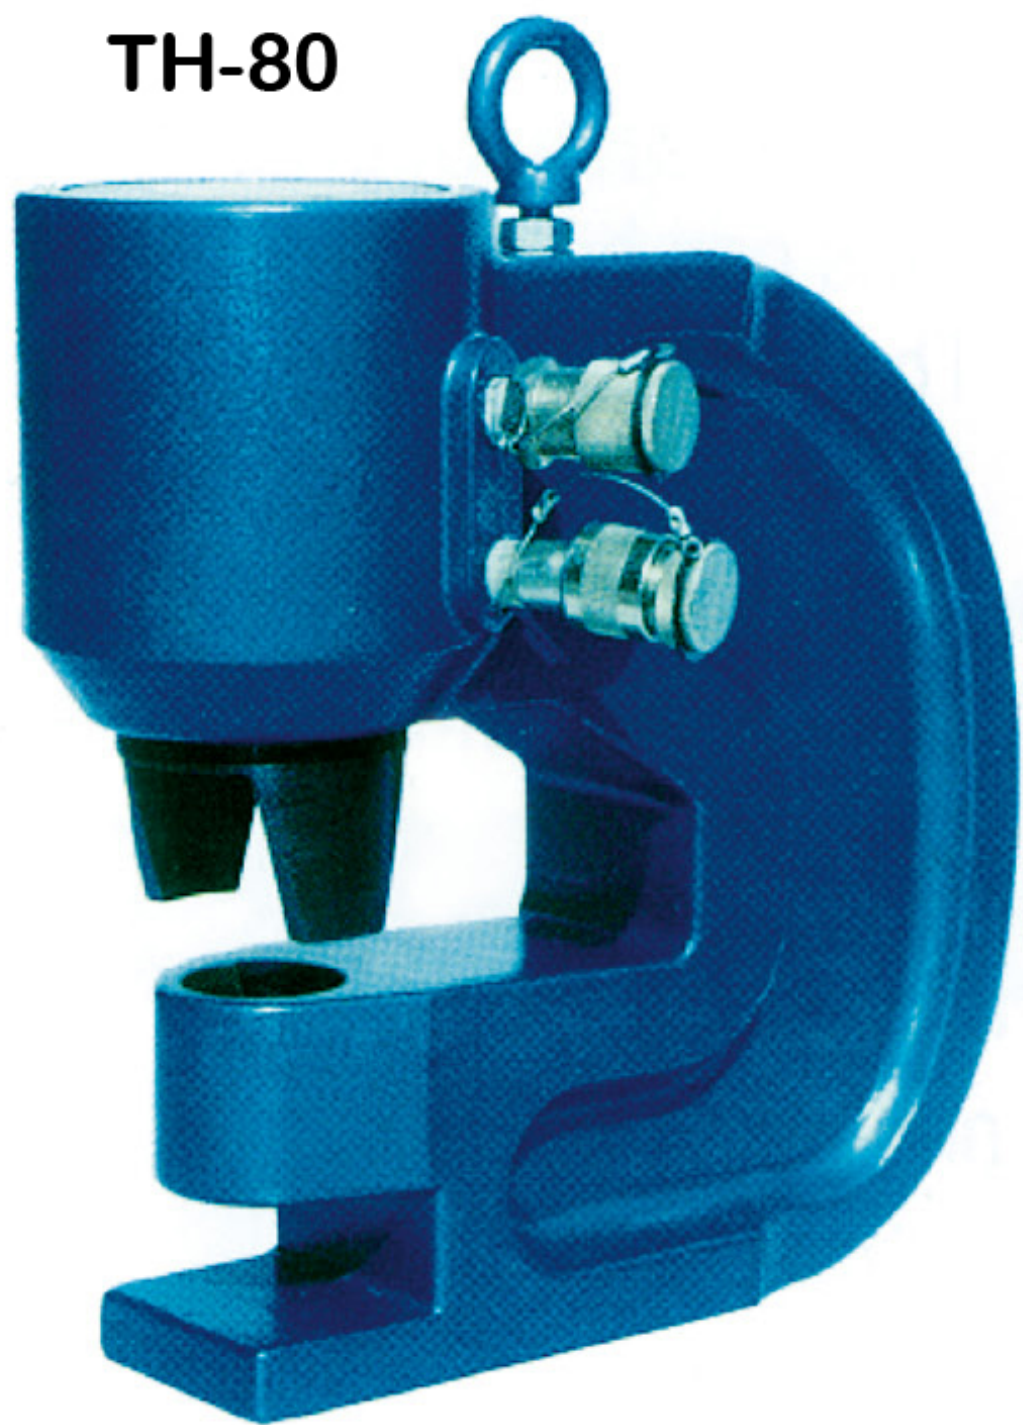


Figure for specification

| Model | | CH-80 |
|---------------------------------|--------------|------------------------|
| Max. hole diameter | (mm) | 25 |
| Max. Thickness | (mm) | 16 |
| Throat depth | (mm) | 140 |
| Output | (ton) | 50 |
| Dies equipment | (mm ϕ) | 16,18,22,25 \times 4 |
| Available pump double-hole type | | CTE-25D, D-2SW-4 |



D-2SW-4
Double return way of power over high pressure

Example used

